


## Advidia A Series Firmware Upgrade

1. Log into the camera. The default Username/password is admin/12345:

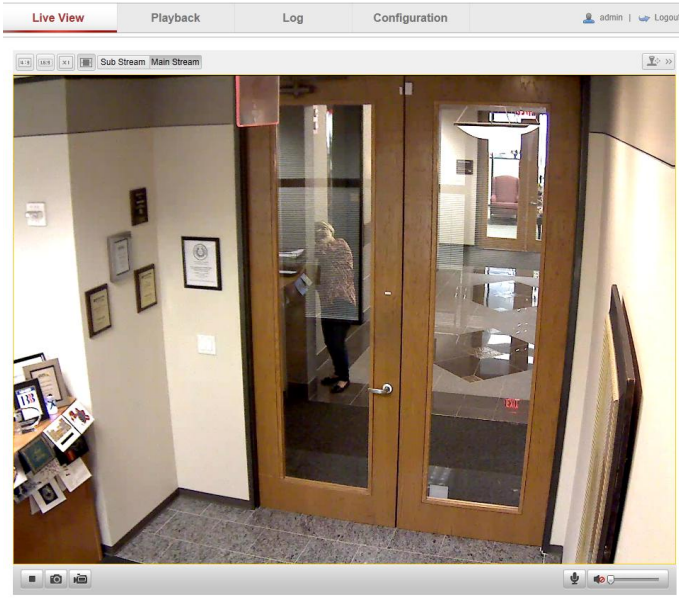

2. Click on Configuration\Maintenance:

Device Information | Time Settings | Maintenance

**Reboot**

Reboot the device.

**Default**

Reset all the parameters, except the IP parameters and user information, to the default settings.

Restore all parameters to default settings.

**Import Config. File**

Config File

Status

**Export Config. File**


**Remote Upgrade**

Firmware


Status

**Note :** The upgrading process will be 1 to 10 minutes, please don't disconnect power to the device during the process. The device reboots automatically after upgrading.

3. Browse to the location you saved the digicap.dav file to:

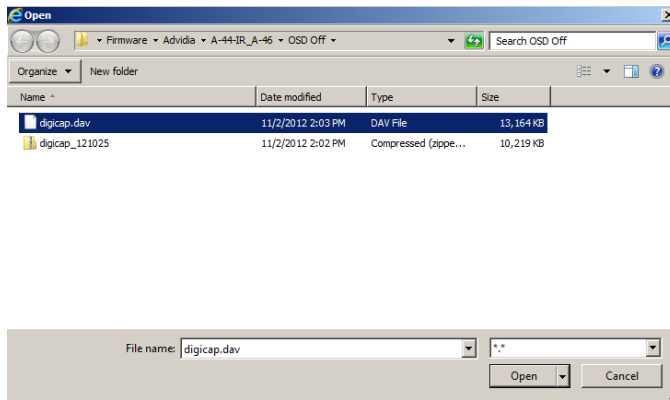

4. Click Upgrade to begin the firmware upgrade process:

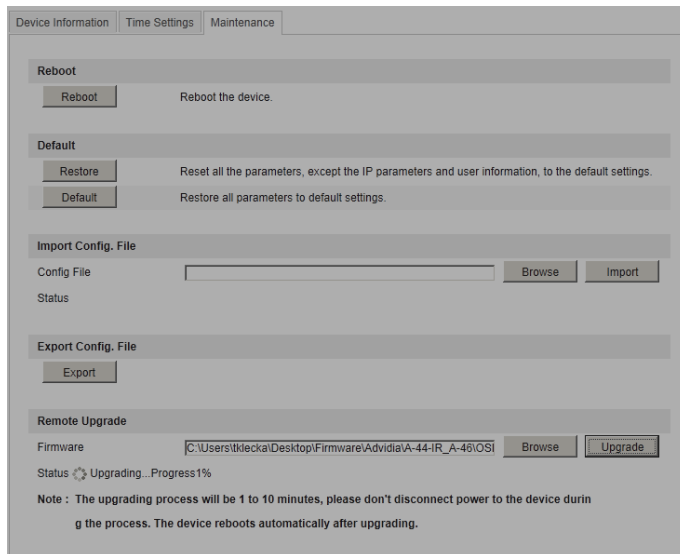

**DO NOT POWER DOWN OR REMOVE THE DEVICE FROM THE NETWORK DURING THE UPGRADE PROCESS.** The device will automatically restart once the upgrade is complete

5. Once the upgrade has finished, select Device Information to insure the upgrade completed successfully:

Device Information | Time Settings | Maintenance

**Basic Information**

Device Name	A45-Front-Lobby
Model	A-45
Serial No.	A-450120120724BBRR409901853
Firmware Version	V4.0.1 121025
Encoding Version	V4.0 build 120508
Number of Channels	1
Number of HDDs	0
Number of Alarm Input	1
Number of Alarm Output	1